


## Frame Assembly

### Parts List

- (11) 28" TUBES
- (4) 27" TUBES
- (4) 18" TUBES
- (4) 14" TUBES
- (8) 3-WAY CONNECTORS
- (4) 4-WAY CONNECTORS
- (2) T CONNECTORS
- (2) WIRE SHELVES

1. Assemble the frame as shown in Fig. 1. Make sure the TUBES are fully pressed into the CONNECTORS.
2. Place the WIRE SHELVES on the top and middle tiers of the frame.

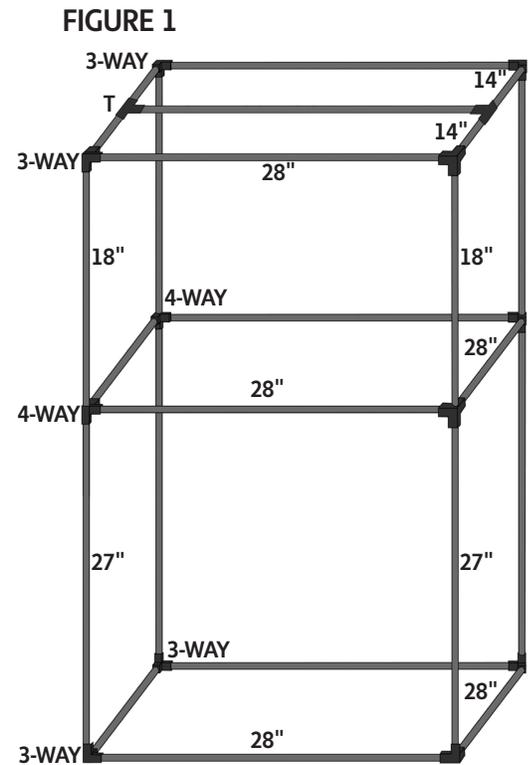

## Light Assembly

### Parts List

- (2) FLAT SUPPORTS
- (2) LIGHT BRACKETS with CLIPS
- (3) LIGHTS
- (1) BINDING BOLT (2 pieces)
- (4) BOLTS
- (2) LINKING CABLES
- (1) POWER CORD
- (4) HANGER ASSEMBLIES (Fig. 5 & 6, see reverse side)


### Tools

- ALLEN WRENCH (included)
- Phillips or flathead screwdriver (not included)


3. Line up the holes in the centers of the FLAT SUPPORTS and slide one half of the BINDING BOLT through them. Place the other half of the BINDING BOLT through the other side and use your screwdriver to attach them (Fig 2.) **NOTE:** The FLAT SUPPORTS will feel loose even after tightening.
4. Examine the channels on top of the LIGHT BRACKETS to find the attached nuts (Fig 3.). Use the ALLEN WRENCH to spread them out and position the holes in the ends of the FLAT SUPPORTS over them. Place a BOLT through each hole and use the ALLEN WRENCH to tighten them into the nuts.
5. Adjust the ends of the FLAT SUPPORTS so they are centered on the LIGHT BRACKETS, using the numbers on the BRACKETS as a reference.

*over please*

**Figure 2**

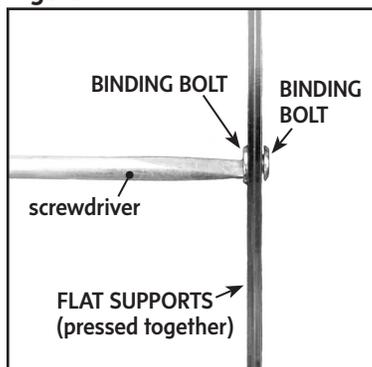

**Figure 3**

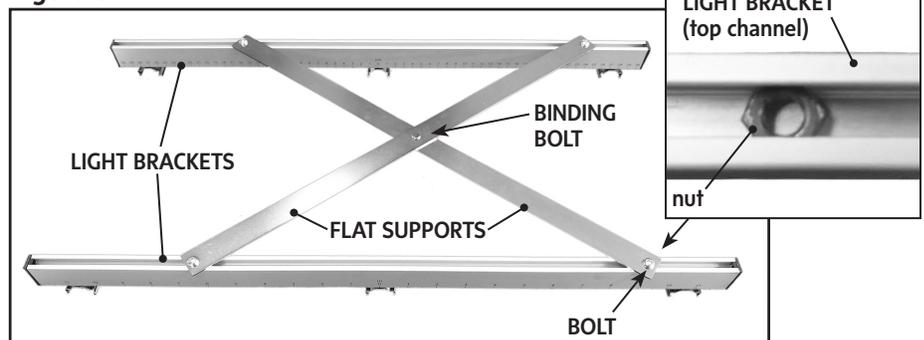

**8% of our profits** go back to our communities.  
Learn more at [gardeners.com](http://gardeners.com)/FORCE-FOR-GOOD

## Light Assembly continued

- Flip the attached LIGHT BRACKETS and FLAT SUPPORTS upside down with the attached CLIPS facing up. Use the ALLEN WRENCH to loosen the nuts in the center of the 4 outside CLIPS and slide them in to the 22 cm spots on the BRACKETS. Tighten them back into place.
- Examine the ends of the LIGHTS and notice how there are male and female ends. Using Fig. 4 as a reference, place the LIGHTS into the CLIPS attached to the LIGHT BRACKETS with the ends alternating male and female. Plug the LINKING CABLES and POWER CORD into the ends of the LIGHTS.
- Assemble the HANGER KITS by attaching the wire cords to the ring, carabiner and clip hook as shown in Fig. 5.
- Snap the 4 hanger clips onto the ends of the 2 outside LIGHTS. Slide the carabiners through the holes in the top of the hanger clips and position them as shown in Fig. 6. Attach the clip hooks to the top WIRE SHELF so the assembled lights are suspended over the bottom SHELF.

### Light Height

You can position your light at 3 different heights. The lowest height is when the HANGER KITS are fully extended. You can also slide the rings into the carabiners to raise the lights part-way (Fig. 6.) or attach the carabiners directly to the top WIRE SHELF.

Figure 5: HANGER KIT assembled

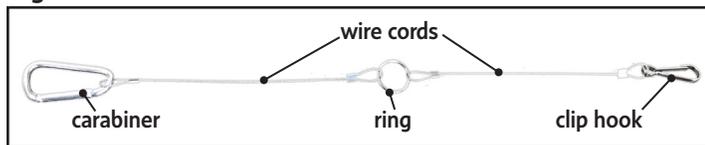


Figure 4


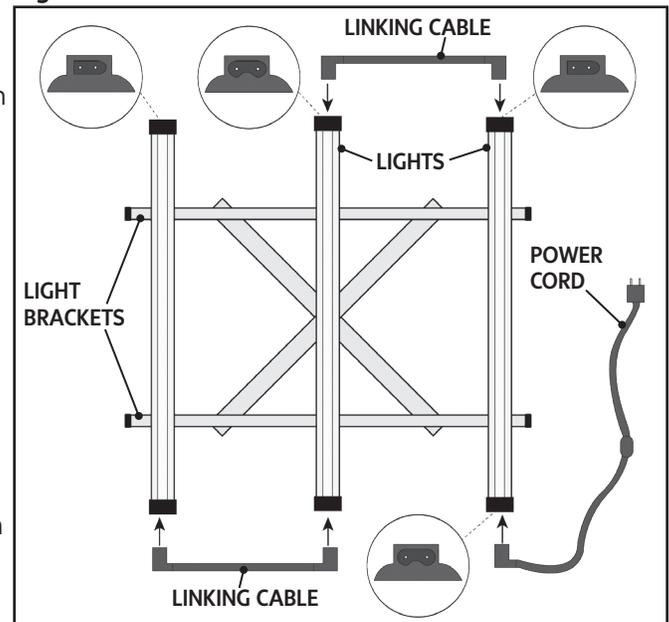


Figure 6

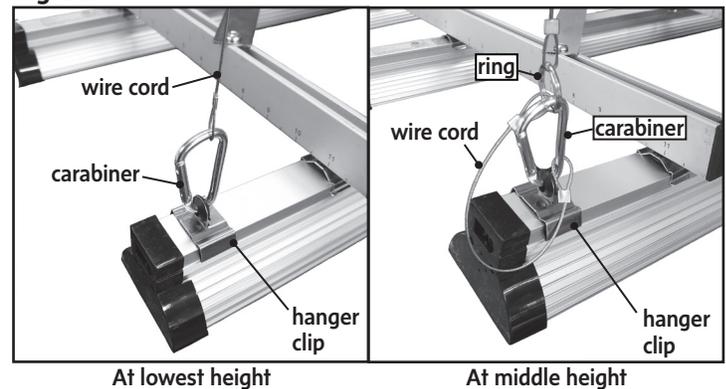

## Final Assembly

### Parts List

- (1) COVER
- (1) TRAY

- Unzip the COVER and slide it over the top of the frame (Fig. 7). Place the TRAY on the floor and plug the POWER CORD into your outlet or timer. Your assembly is complete!

Please refer to the **Gardener's Supply Company Hemp Grow Guide** (included with your Hemp Grow Frame, Lights and Tray) for complete growing instructions.

Figure 7

